



VersaTread Round - Square Installation

Square Specs

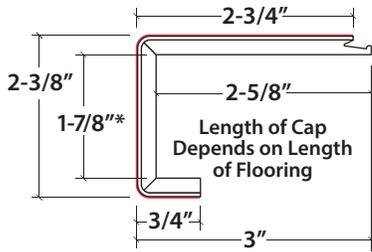

Measure from top of Cap to Stair Riser to cut your planks to the right size



Basic Installation of VersaTread Square

Step 1


Clean the staircase from all dust and debris. All wood or concrete stair surfaces must be properly prepared, stable, flat, and free of adhesive residue or anything that may be an adhesive bond breaker. **IMPORTANT: Installing over existing flooring on stairs is not permitted. Existing flooring must be removed.**

Once staircase is clean, measure each stair and cut your planks and caps. *If creating returns, use a miter saw set at 45° angles to make the cuts.* Dry fit the caps, returns, & planks prior to spreading any adhesive. Leave them in place until ready to glue down.

NOTE: Start at the top of the Stair Case and work your way down. The strategy, as you will see in the steps that follow, will be to glue and staple down the VersaCap first. Then, glue down the plank and/or return(s). Then, move on to the next stair and repeat Steps 2 to 6.


Step 2

IMPORTANT: The VersaCap does not come with an underlayment. Apply enough adhesive to the broad flat area to make the Caps & Returns level with the floor plank. Turn the first VersaCap over and apply adhesive on the squared end and a generous amount of adhesive on the broad flat area. (See illustration on the left).

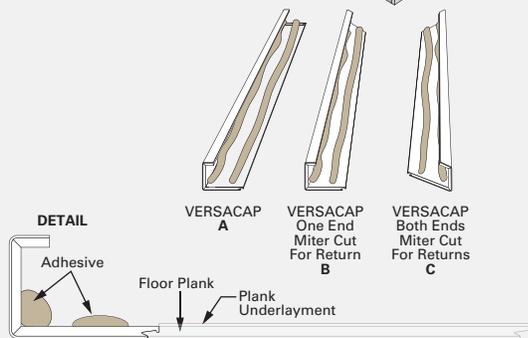


Step 3

Place the Versacap on the stair. Position it where you want it. **Clean up any excess adhesive with a damp rag.**




Step 4

Make sure the underlayment is firmly and completely attached to the floor plank. If it is not, either remove it or reattach it with PUR adhesive. Next, take the plank and/or return(s) that go with the VersaCap you just fixed on the Stair. Turn them over and apply a generous amount of adhesive to them. If installing returns, apply glue to the squared end of the return and then apply adhesive to the broad flat area of the return like you did to the Cap in **Step 2.** (See illustrations to the left).

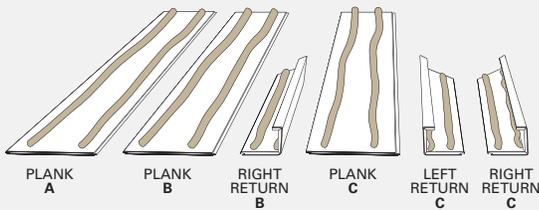

Step 5

Next, place the plank and/or return(s) in place. **Clean up any excess adhesive with a damp rag before applying the painters tape.**

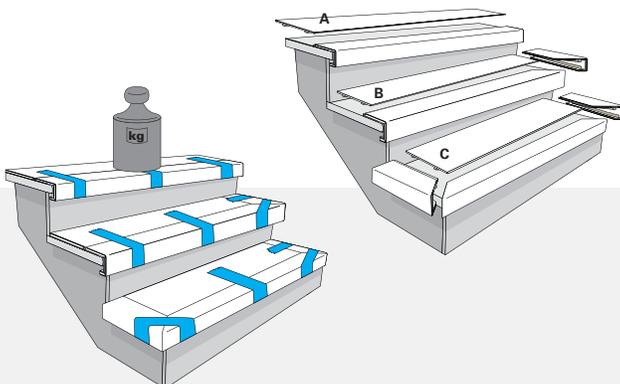


Step 6

Use painter's tape to tape the VersaCap to the flooring plank and returns. Place a heavy weight across the seams. Let the adhesive cure for 48 hours before heavy traffic. Once dry, you can remove painter's tape from stairs.

Next, move on to the next stair and **repeat Steps 2 to 6.**

Cutting VersaTread to Create Returns

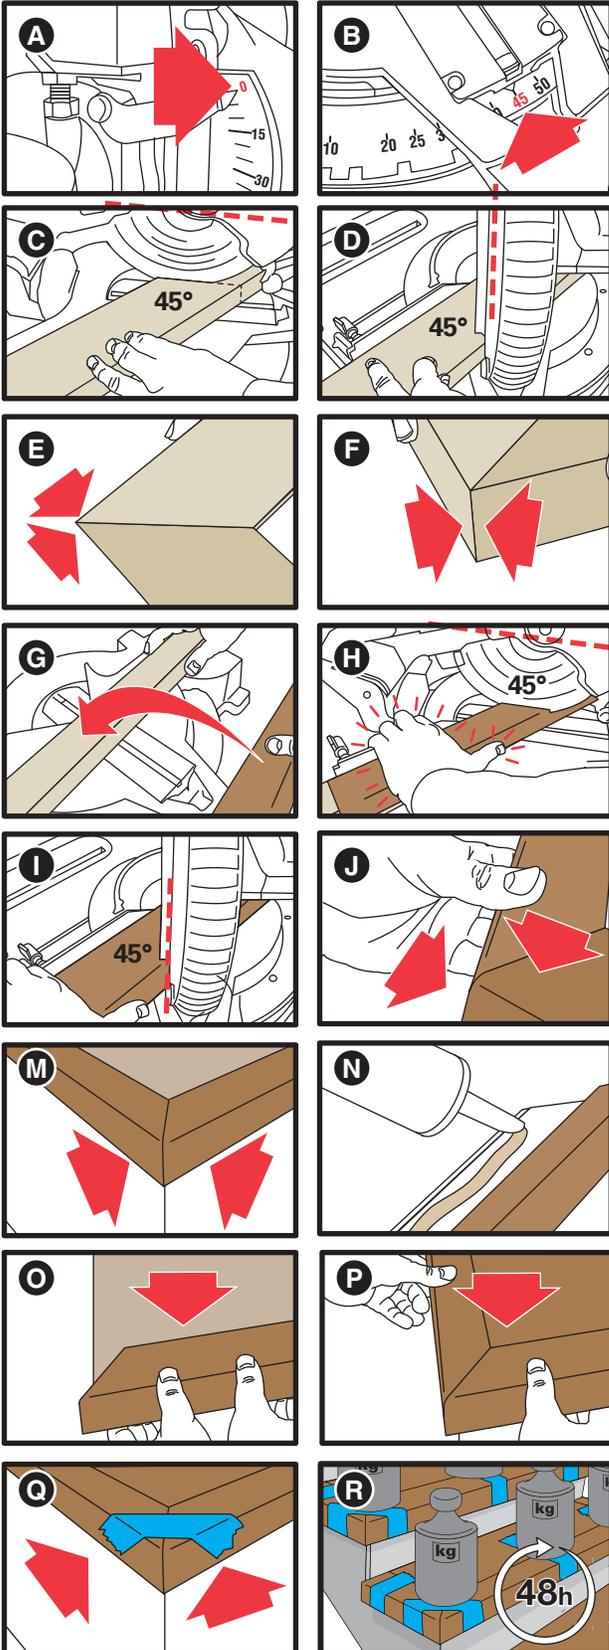

We recommend using a compound miter saw fitted with a **carbide tipped cross blade (60 or 80 teeth, ATB)** for cutting the aluminum VersaEdge Extra Tall molding.

Make sure to use safety goggles and thick gloves while using saw and handling the blade

STEP 1 - MAKE TEST CUTS ON SCRAP 2x4

IMPORTANT: Make sure the bevel angle is set to **ZERO (A)**.

We highly recommend you do a test cut on 2 scrap pieces of 2x4 to make sure your cuts line up. Set the miter angle to **45 degrees** for the first cut (B). Cut the 2x4 (C).

Then change angle of miter cut to **45 degrees** in the other direction (D). Cut the other piece of 2x4.

Line up ends of the 2x4s to form a corner (E). Check the pieces to see if they line up correctly with **no gap** on the top or front view (F).

STEP 2 - CUT YOUR VERSACAP

IMPORTANT: Use a scrap 2x4 piece to set VersaCaps on while you make the cuts (G). This will keep them level as you cut.

Set the miter angle to **45 degrees**. Cut the VersaCap (H).

REMINDER: Always wear safety goggles when using the saw

IMPORTANT: Hold the VersaCap extremely tight, otherwise it will pull in the direction of the blade and your cut will be off

Change miter angle to **45 degrees** in the other direction (I). Cut the other piece that you are using for the Return. Again, **make sure you hold the VersaCap extremely tight. Don't let it move while you make the cut.**

Check the Cap & Return to see if they line up correctly with **no gap** on the top or front view (J).

STEP 3 - APPLYING THE CAP & RETURN TO THE STAIRS

IMPORTANT: The VersaCap does not come with an underlayment. Apply enough adhesive to the broad flat area to make the Caps & Returns level with the floor plank.

After wiping the Cap & Return clean from debris, test the fit on your stairway. Make sure there is no gap between them (M).

After you test the fit, run thick lines of **Titegrip adhesive** (or comparable PUR adhesive) along the inside lip and along the broad flat surface of the VersaCap (N).

Put the Cap in place, pressing down firmly to make sure it is in contact with the stair (O). Make sure the edge is square. **Clean up any excess adhesive with a damp rag.**

IMPORTANT: Make sure the underlayment is firmly and completely attached to the floor plank. If it is not, either remove it or reattach it with PUR adhesive. Next, take the plank and Return that go with the VersaCap you just fixed on the Stair. Turn them over and apply a generous amount of adhesive to them. Apply glue to the lip of the return and then apply adhesive to the broad flat area.

Next, place the plank and Return in place (P). **Clean up any excess adhesive with a damp rag before applying the painter's tape.**

While pressing both ends firmly together, stretch a piece of painter's tape tightly across the corner edge to keep the moldings from separating while the adhesive cures (Q). Place a heavy weight across the seams (R). Let the adhesive cure for 48 hours before heavy traffic. Once dry, you can remove painter's tape from stairs.